
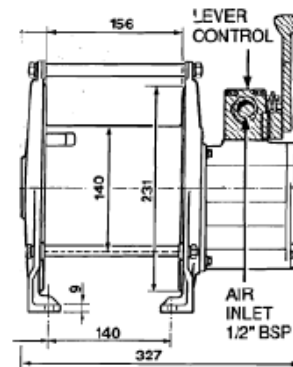


LIFTSTAR RANGE

LIFTSTAR 600 = 600 KG SWL

SPEED	0-30M/MIN
AIR CONNECTION	¼" BSP
WORKING PRESSURE	6.3BAR OR 90 PSI
FLOW	2.2M ³ /MIN OR 77 CFM
WEIGHT	28KG WITHOUT ROPE
RECOMMENDED ROPE SIZE	6.5MM (MIN BREAK 3000KG LIFTING)
ROPE CAPACITY	60 METRES (SEE GRAPH ON SPEC SHEET)
APPLICATION	LIFTING AND HAULING
BRAKE	INTERNAL AUTO, MULTI DISC

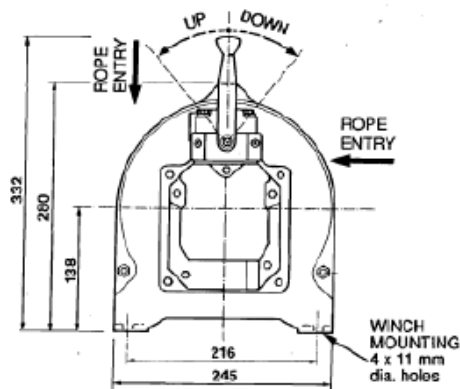

Cumulative rope capacity

Number of layers		1	2	3	4	5	6	7
Capacity (m) Standard model	rope 6.5 mm dia.	10	21	33	46	60	74	90
	rope 7.5 mm dia.	9	18	29	41	53	66	—
	rope 8 mm dia.	8	17	27	38	50	—	—
Capacity (m) GC model	rope 6.5 mm dia.	20	43	67	94	122	152	184
	rope 7.5 mm dia.	18	37	59	83	108	135	—
	rope 8 mm dia.	18	35	56	78	103	—	—

Rating limit ▶