


LIFTSTAR RANGE

LIFTSTAR 1500 = 1500 KG SWL

SPEED	0-20M/MIN
AIR CONNECTION	¾ "BSP
WORKING PRESSURE	6.3BAR OR 90 PSI
FLOW	3.5M ³ /MIN OR 125 CFM
WEIGHT	63.5KG WITHOUT ROPE
RECOMMENDED ROPE SIZE	10MM (MIN BREAK 7500KG LIFTING)
ROPE CAPACITY	32 METRES (SEE GRAPH ON SPEC SHEET)
APPLICATION	LIFTING AND HAULING
BRAKE	INTERNAL AUTO, MULTI DISC

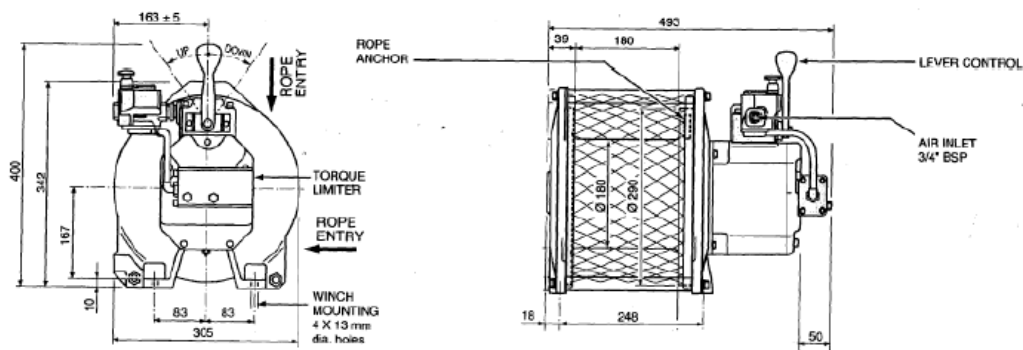

Cumulative rope capacity

Number of layers	1	2	3	4	5	6	
Capacity (m) Standard model	Rope 9 mm dia.	10	22	35	49	64	80
	Rope 10 mm Dia.	9	20	32	45	58	-
Capacity (m) GC model	Rope 9 mm dia.	22	46	73	101	132	165
	Rope 10 mm dia.	20	42	66	92	121	-

Rating limit →