

NIM RANGE

NIM E0.5 = 500KG SWL

SPEED 0-6M/MIN (SINGLE SPEED) 1ST LAYER

WEIGHT 310KG WITHOUT ROPE

RECOMMENDED ROPE SIZE 6MM (MIN BREAK 5000KG)

ROPE CAPACITY 220 METRES IN 5 LAYERS

APPLICATION LIFTING AND HAULING

BRAKE AUTO ELECTRO MAGNETIC BRAKE


START UP AMPS 36AMPS

RUNNING LIGHT AMPS 5.5AMPS

PROOF LOAD AMPS 15 AMPS

ROPE CONNECTION ROPE IS CONNECTED TO THE DRUM FLANGE WITH CLAMP

SPECIFICATION 415V – 50HZ – 3PH SUPPLY

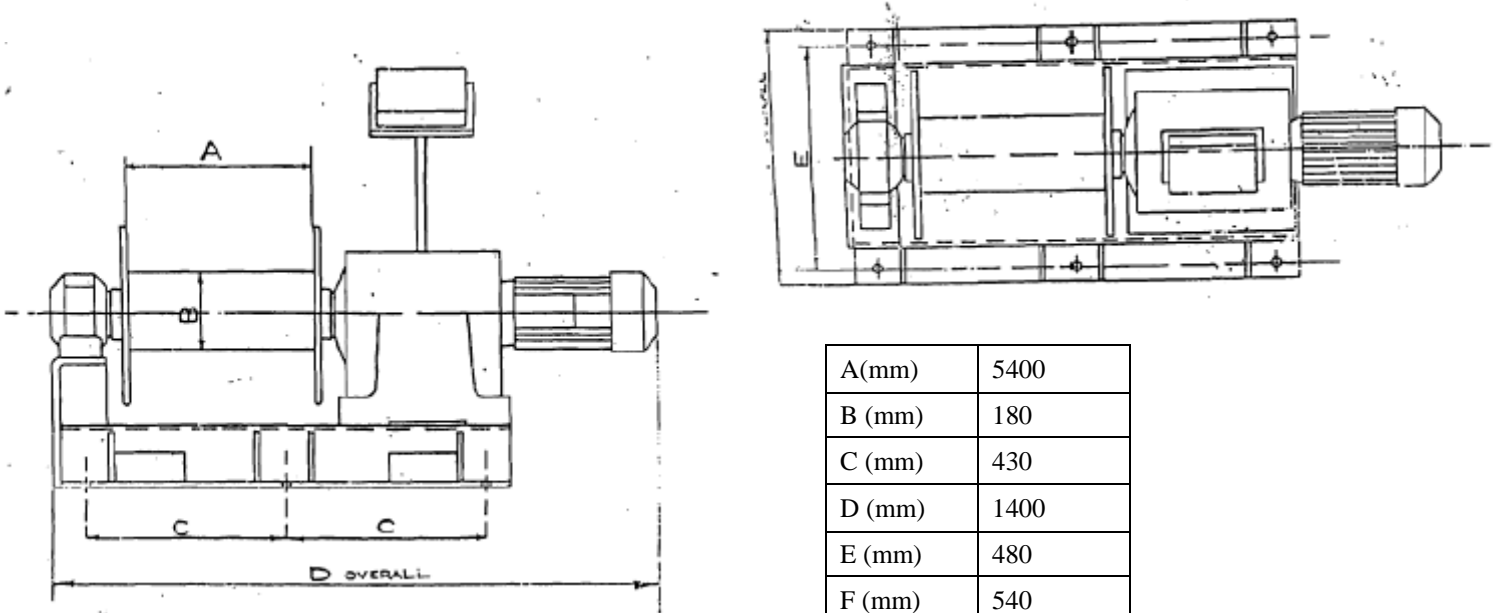

A(mm)	5400
B (mm)	180
C (mm)	430
D (mm)	1400
E (mm)	480
F (mm)	540